


PJ-20

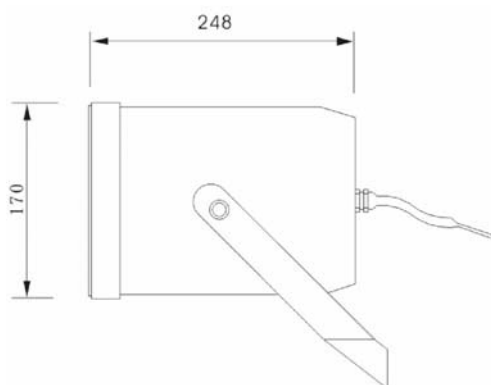

ATENCIÓN:

- La instalación debe ser realizada por personal técnico cualificado.
- Conectar en paralelo los altavoces a los terminales de salida correspondientes del amplificador.
- Asegurarse de que todos los altavoces tengan la misma polaridad.
- No cambiar la toma del transformador mientras el altavoz está en funcionamiento.
- No exponer el equipo a fuentes de calor, ni a la llama.


CARACTERÍSTICAS

Modelo	PJ-20
Altavoz	6,5"
Potencia RMS	20 W
Selección de potencia 100 V	20 W, 10 W y 5 W
Selección de potencia 70 V	10 W, 5 W y 2,5 W
Impedancia	500 Ω , 1 k Ω y 2 k Ω
Sensibilidad	92 dB SPL a 1 W, 1 m y 1 kHz
Presión acústica	105 dB SPL a 20 W, 1 m y 1 kHz
Respuesta en frecuencia	110 ~ 15.000 Hz
Dimensiones (mm)	\varnothing 170 x 248 (fondo)
Peso	1,75 kg
Acabado	Plástico HIPS. Rejilla metálica
Color	Blanco
Montaje	Soporte en U orientable
Selección de potencia	Por cables

SELECCIÓN DE POTENCIA

Impedancia	100 V	70 V	Cable
500 Ω	20 W	10 W	Rojo
1 k Ω	10 W	5 W	Amarillo
2 k Ω	5 W	2,5 W	Verde
-	Común	Común	Azul

PJ-20

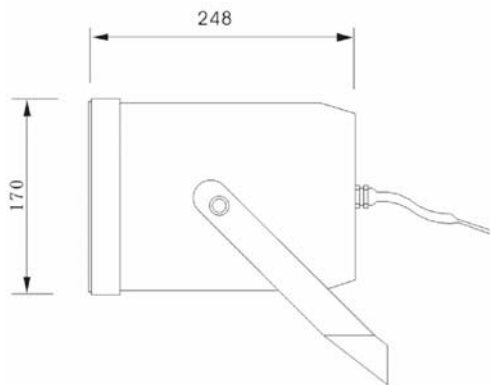

WARNING:

- Installation by qualified personnel only.
- Speakers must be wired in parallel and connected to the correct line terminals of amplifier.
- Ensure that all speakers have the same polarity with respect to each other.
- Do not select another tapings if the speaker is in use.
- No naked flame sources, such as lighted candles, should be placed on the apparatus.

SPECIFICATIONS

Model	PJ-20
Loudspeaker	6,5"
Rated Power (RMS)	20 W
Power Taps 100 V	20 W, 10 W & 5 W
Power Taps 70 V	10 W, 5 W & 2,5 W
Impedance	500 Ω , 1 k Ω & 2 k Ω
Sensitivity SPL (1 W / 1 m)	92 dB SPL a 1 W, 1 m & 1 kHz
Sound Pressure SPL (20 W / 1 m)	105 dB SPL a 20 W, 1 m & 1 kHz
Freq. Range	110 ~ 15.000 Hz
Dimension (mm)	\varnothing 170 x 248 (depth)
Weight	1,75 kg
Finish	HIPS plastic. Metallic grille
Color	White
Mounting	U type mounting bracket
Power selection	By cables

INSTALLATION GUIDE

Impedance	100 V	70 V	Cable
500 Ω	20 W	10 W	Red
1 k Ω	10 W	5 W	Yellow
2 k Ω	5 W	2,5 W	Green
-	Common	Common	Blue